

Project Details

The Maplelane Rd. Waterline Project is a Clackamas River Water (CRW) Capital Improvement Project to replace existing waterline. This project consists of laying approximately 3,000 feet of 8-inch diameter ductile iron waterline; including connections to existing waterlines, services and other related facilities. Construction will be along Maplelane Rd. and within easement in Clackamas, OR.

Construction Cost: Approximately \$846,000

Benefits: This project will replace existing 1970's era 4-inch and 6-inch cast iron waterlines on the route which is beyond its useful service life with frequent leaks.

Construction Schedule and Impacts


Schedule:

Design: July 2021 – January 2022

Construction: February 2022 – July 2022

Time of Day Affected:

Monday – Friday, 7:00 a.m. – 5:00 p.m.

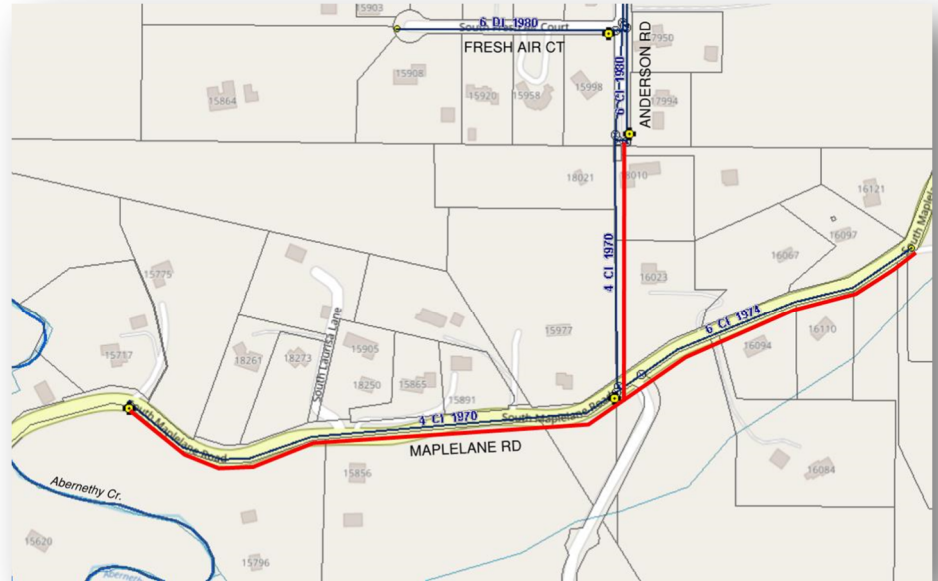

Impact: Construction activity will produce noise, dust and diesel equipment fumes during work hours. During construction, there will be open trenches and equipment in the area such as: dump trucks, excavators, cutting of pavement, and trench rollers, and compactors. Erosion control and spill prevention will be performed to protect natural resources. Roadways disturbed by the utility work will be repaved at the end of the project. Customers will be notified prior to loss of water service, which will be limited to the duration necessary to carry out the required connections.

Traffic: There will be road restrictions during work hours. Access to local driveways may be disrupted occasionally during the work. Emergency access will be provided at all times.

Contact Information: Joseph D. Eskew PE, *Engineering Manager*; (503) 723-2565

16770 SE 82nd Drive, Clackamas, Oregon 97015 | 503-722-9220 | www.crwater.com

Hours: Monday – Thursday 7:30 a.m. – 5:00 p.m., Friday 7:30 a.m. – 4:00 p.m.

